

## Mini Articularm

- The link between conventional handling equipment and expensive robotics systems!
- 200 pound capacity, lifts up to 72" height.
- Mast rotates 360° and forearm rotates 270° for full manipulation capability within 144" diameter.
- 360° wrist rotation for precise positioning of any load!
- Call for information on Omni-directional mobility and wireless remote controls.

# MINI



## Low Cost Manipulation!

Model	Description
AAM-200-MC	Manual hydraulic arm lift, electric cable lift
AAM-200-MB	Manual hydraulic arm lift, electric 110V belt winch w/suitcase hook
AAM-200-MBP	Same as MB on mobile platform truck with outriggers
AAM-200-E	Electric powered 110V AC arm lift, manual mast and forearm rotation
AAM-200-B	Battery powered 12V DC arm lift
AAM-200-BR	Battery powered 12V DC arm lift & powered mast rotation
AAM-200-BRA	Battery powered 12V DC arm lift, powered mast & forearm rotation
AAM-200-BRAS	Battery powered 12V DC arm lift, powered mast, forearm, & wrist rotation

## Mini Pak-Man

- Invert small loads 90° or 180° quickly and effortlessly.
- Electro-mechanically powered clamping and rotation.
- Improve transfer speeds with conveyors or ball transfers.



## Smooth, Clean, Quiet Operation

Capacity (lbs.)	Platform Size (in.)	Maximum Opening (in.)	Minimum Opening (in.)	See page 41 for diagram			Model Number
				Dim. A	Dim. B	Dim. C	
250	15 x 19	16	4	56	19	20	MUI-1519E
250	18 x 24	20	4	56	24	20	MUI-1824E
250	20 x 30	26	6	56	30	20	MUI-2030E
250	24 x 36	30	6	68	36	24	MUI-2436E
250	24 x 48	38	6	68	48	24	MUI-2448E

\*Dimension C can be easily changed to meet your requirements.

# LINE

## Mini Scissor Lift Table

- Available up to 250 pound capacities and up to 70" raised height.
- Designed for smooth, quiet, and efficient operation.
- Electro-mechanically operated; no drift, no leakage (does not apply to hydraulically operated units).
- Unit is extremely compact, yet offers higher lift with double scissor model.
- Available with casters for mobility.




Model DMSL-2448E

**Light &  
Portable!**



Model MSL-A1519B

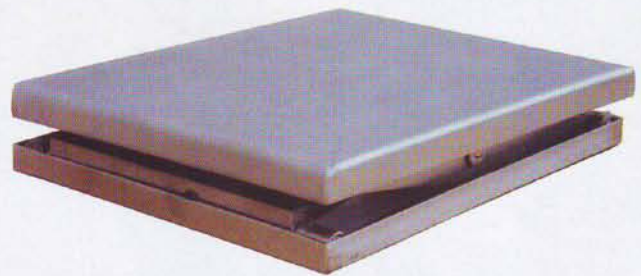

Capacity (lbs.)	Table Size (in.)	Vertical Travel (in.)	Lowered Height (in.)	Raised Height (in.)	Model Number		
					Electric 110V	Battery 12V or 24V DC	Electro-hydraulic 110V
250	15 x 19	12	4	16	MSL-A1519E	MSL-A1519B	MSL-A1519H
250	18 x 24	16	4	20	MSL-A1824E	MSL-A1824B	MSL-A1824H
250	20 x 30	20	5	25	MSL-A2030E	MSL-A2030B	MSL-A2030H
250	24 x 36	24	5	29	MSL-A2436E	MSL-A2436B	MSL-A2436H
250	24 x 48	32	5	37	MSL-A2448E	MSL-A2448B	MSL-A2448H
150	15 x 19	24	6	30	DMSL-1519E	DMSL-1519B	DMSL-1519H
150	18 x 24	32	6	38	DMSL-1824E	DMSL-1824B	DMSL-1824H
150	20 x 30	40	7	47	DMSL-2030E	DMSL-2030B	DMSL-2030H
150	24 x 36	48	7	55	DMSL-2436E	DMSL-2436B	DMSL-2436H
150	24 x 48	63	7	70	DMSL-2448E	DMSL-2448B	DMSL-2448H

\*Electro-hydraulic units, denoted by the suffix 'H', require a remote powerpack.

